

FIG. 1

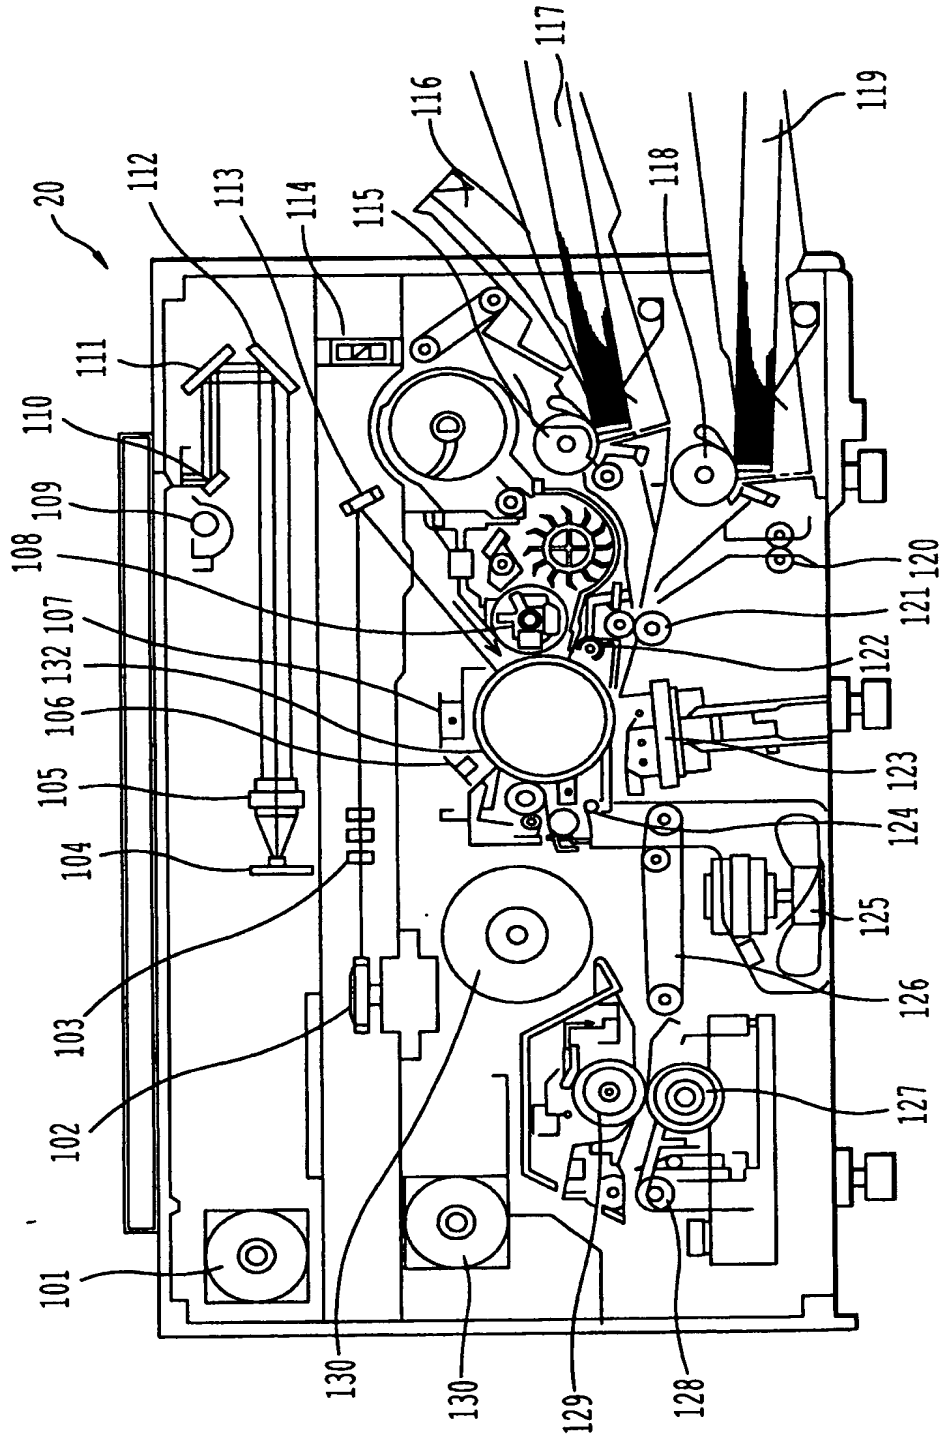


FIG. 2



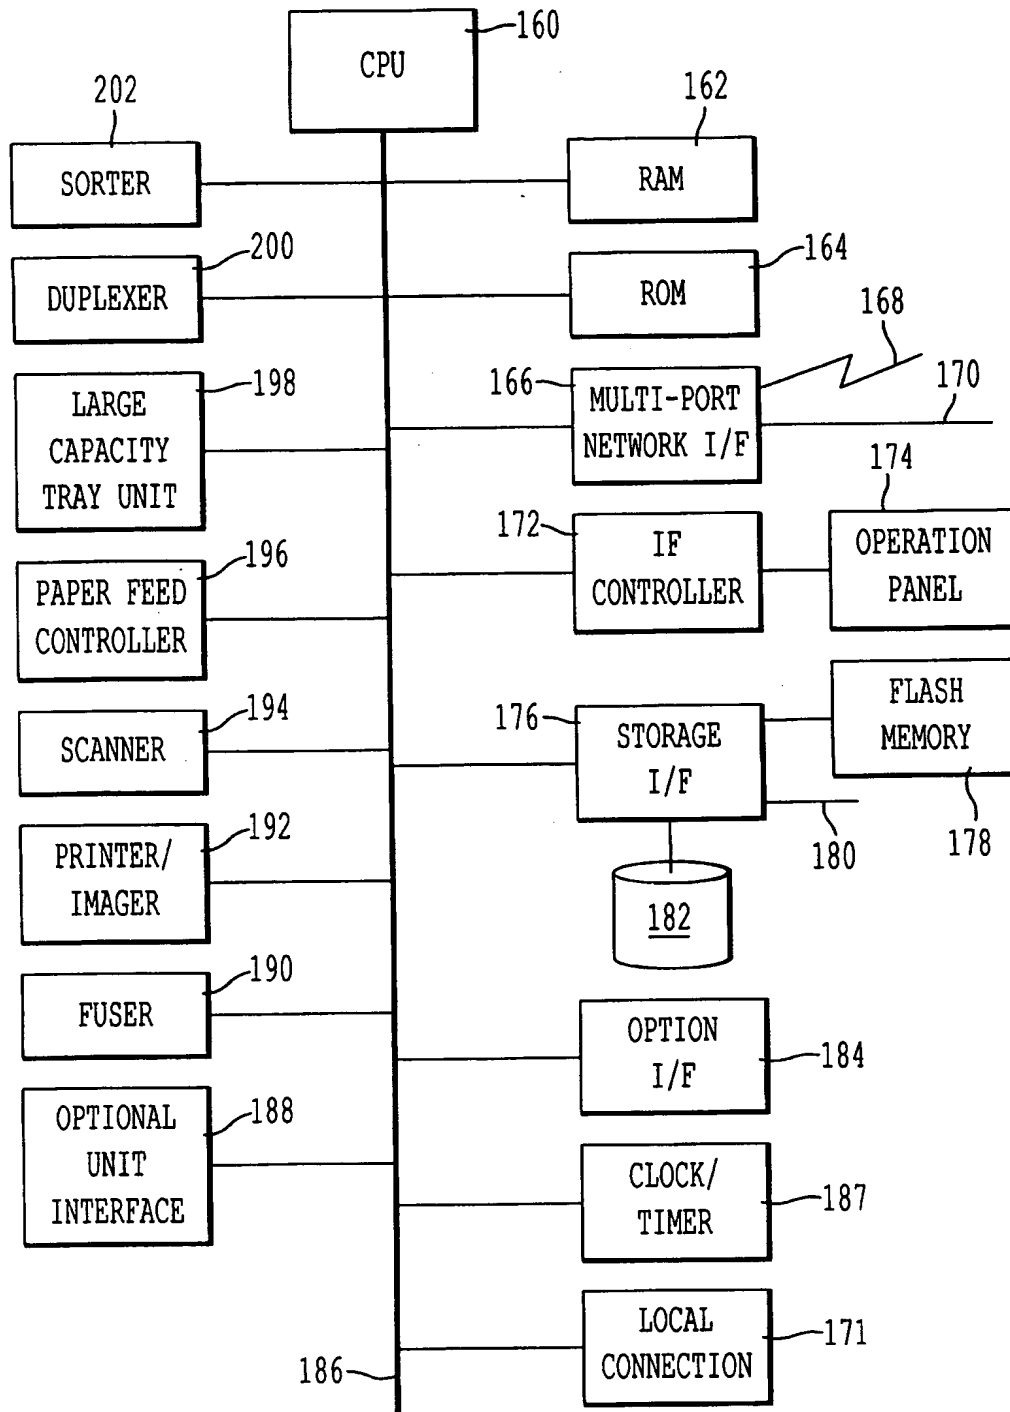



FIG. 3

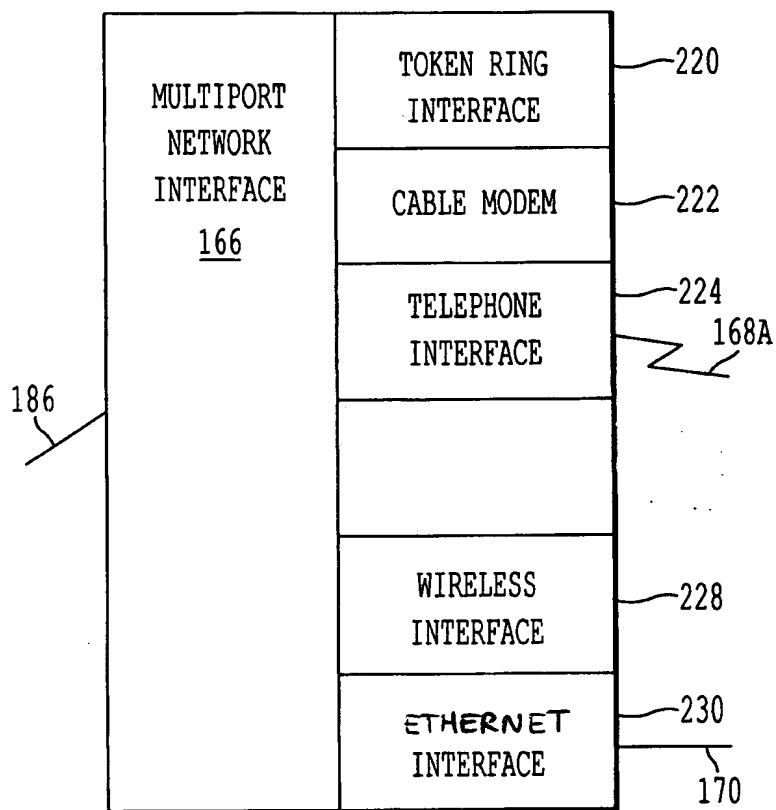


*FIG. 4*

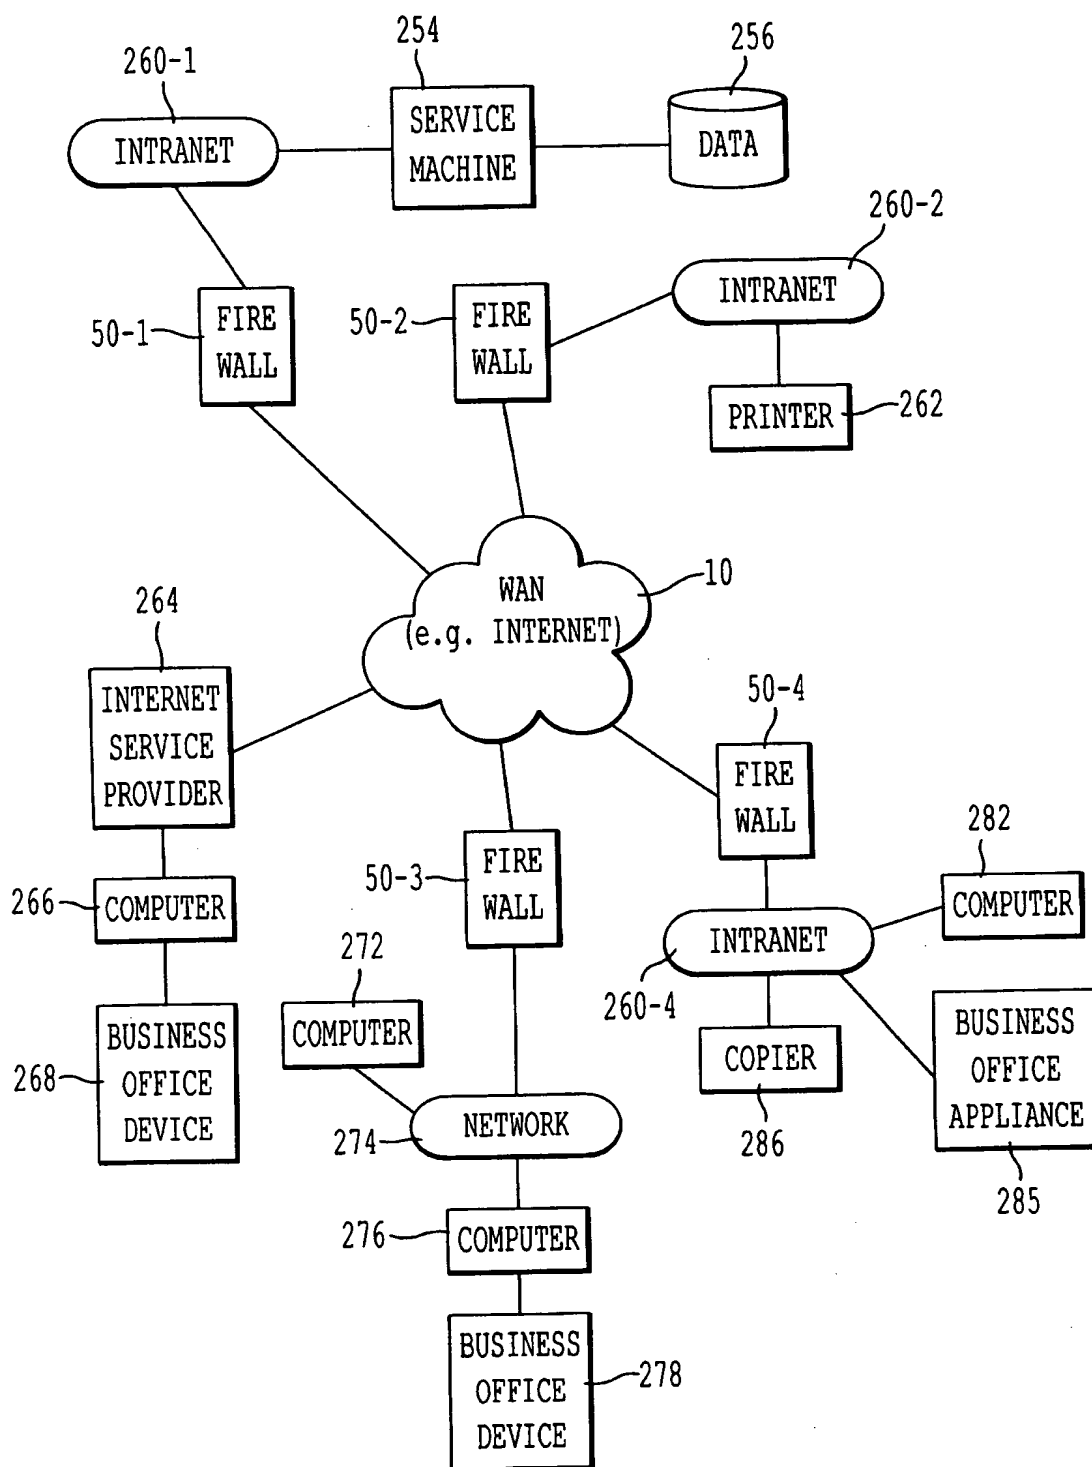


**FIG. 5**

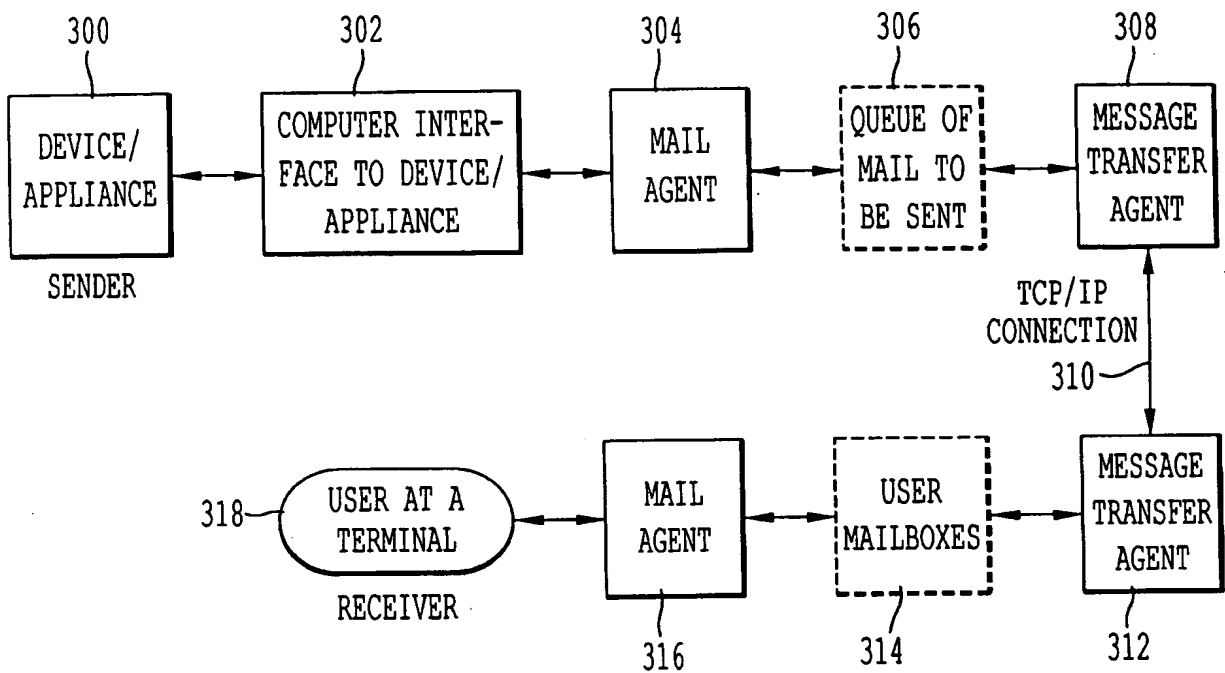


*FIG. 6A*

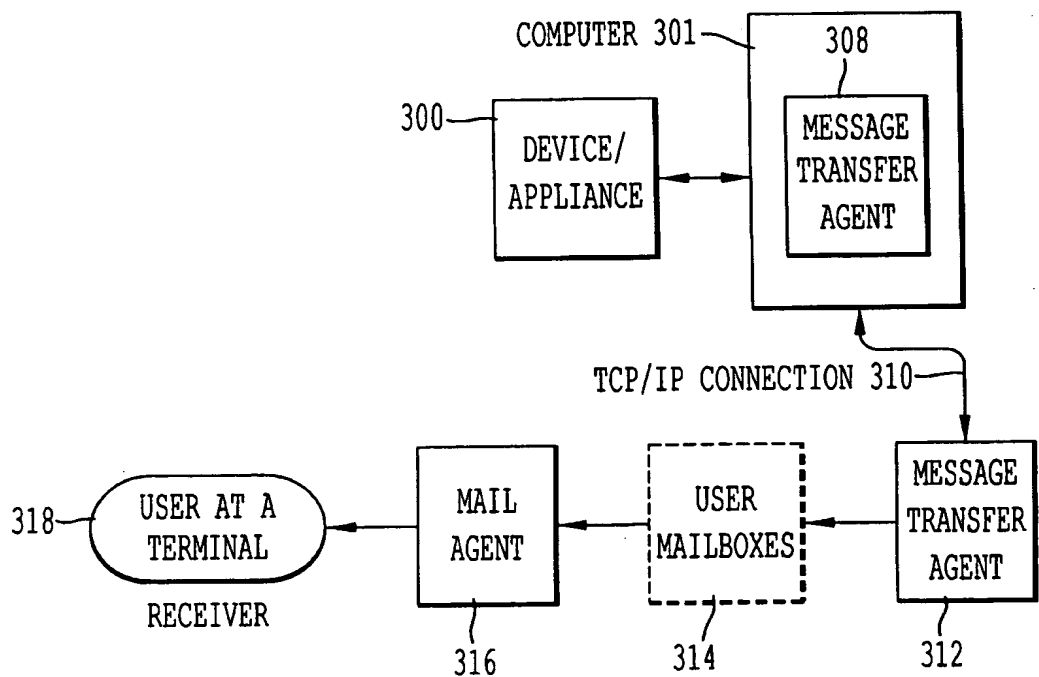

*FIG. 6B*

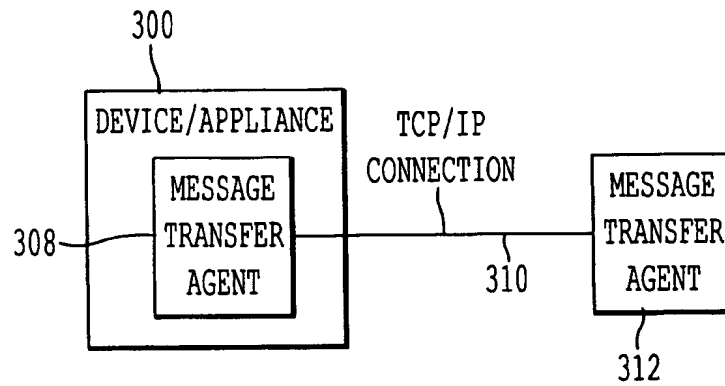

*FIG. 6C*

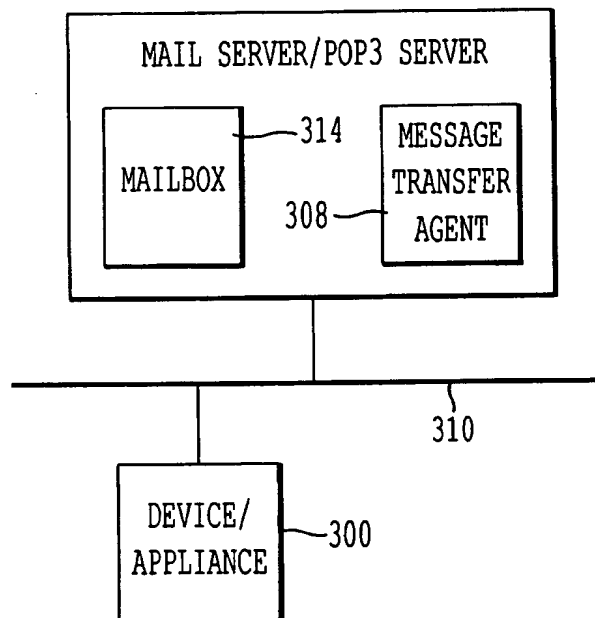

*FIG. 6D*


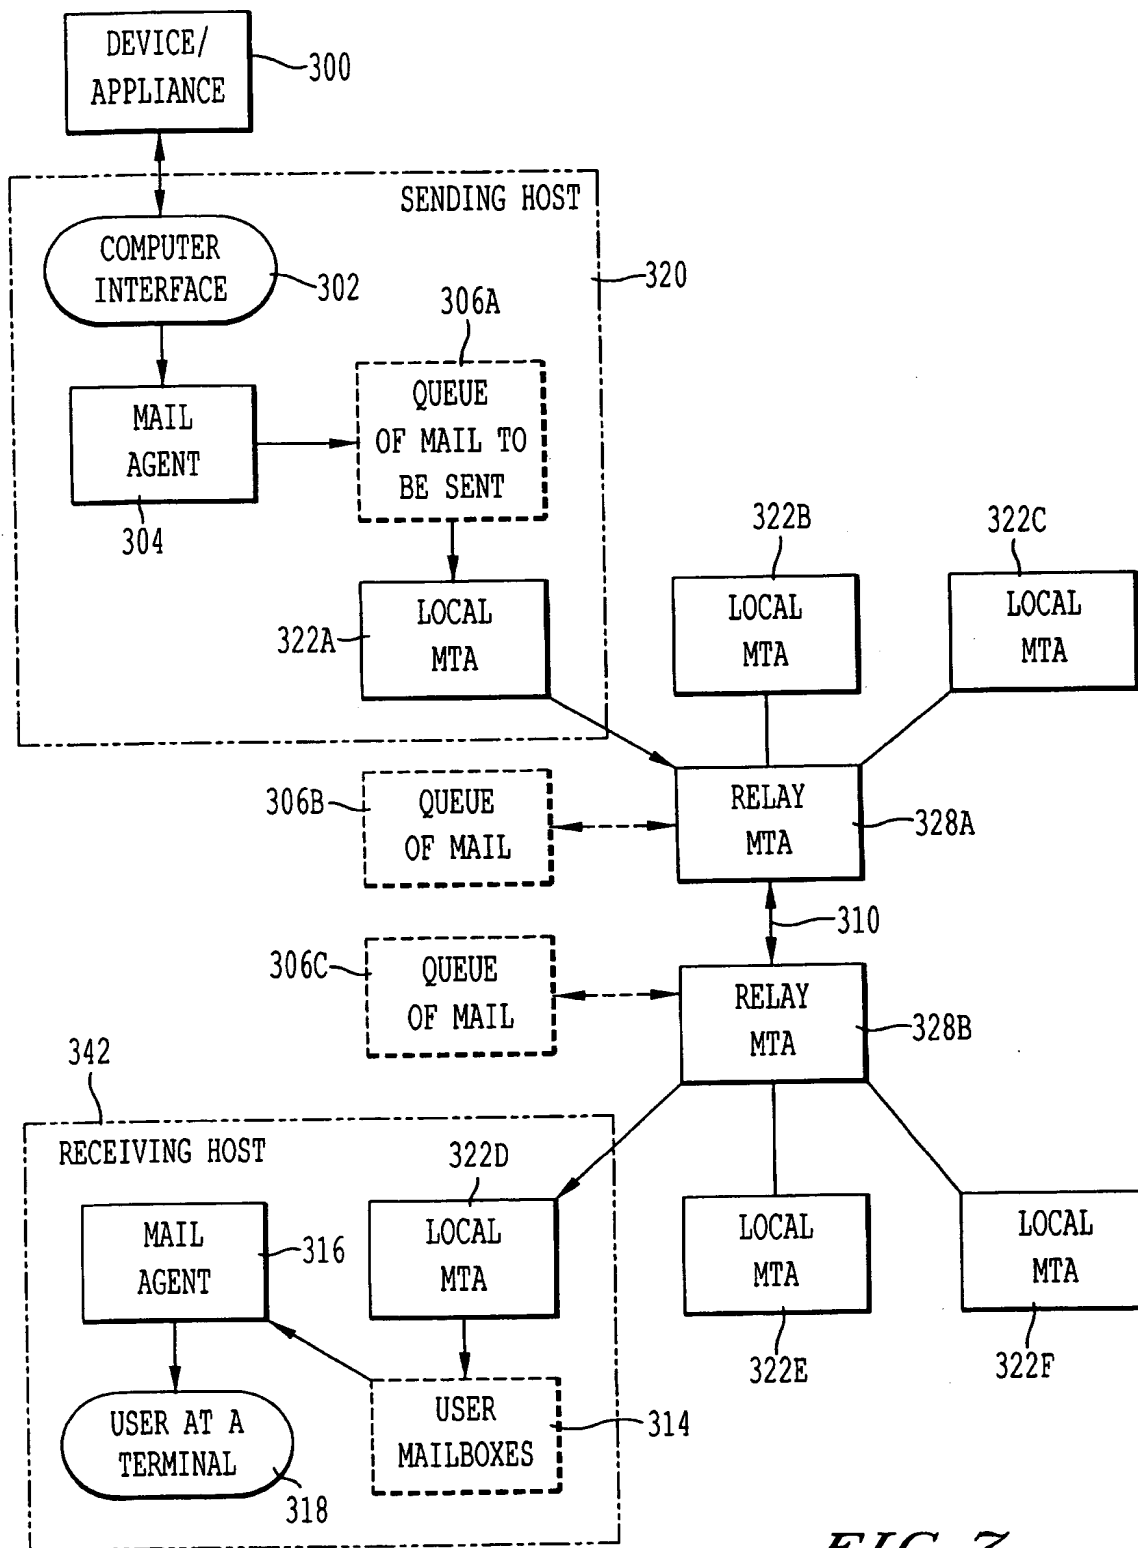


FIG. 7



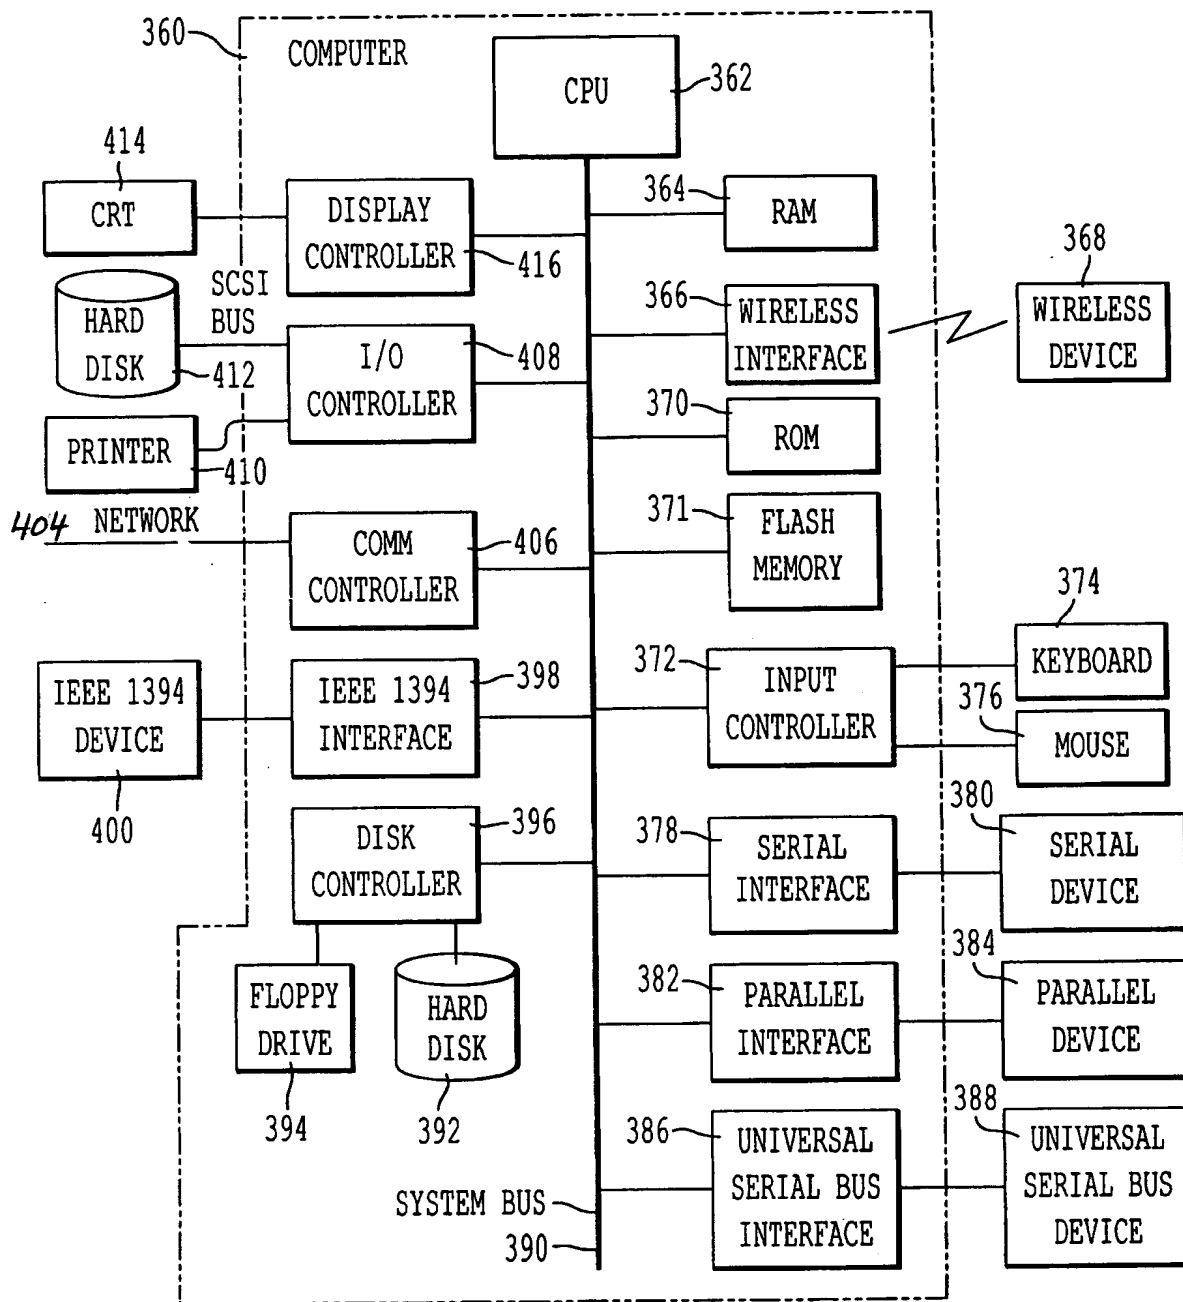

**FIG. 8**

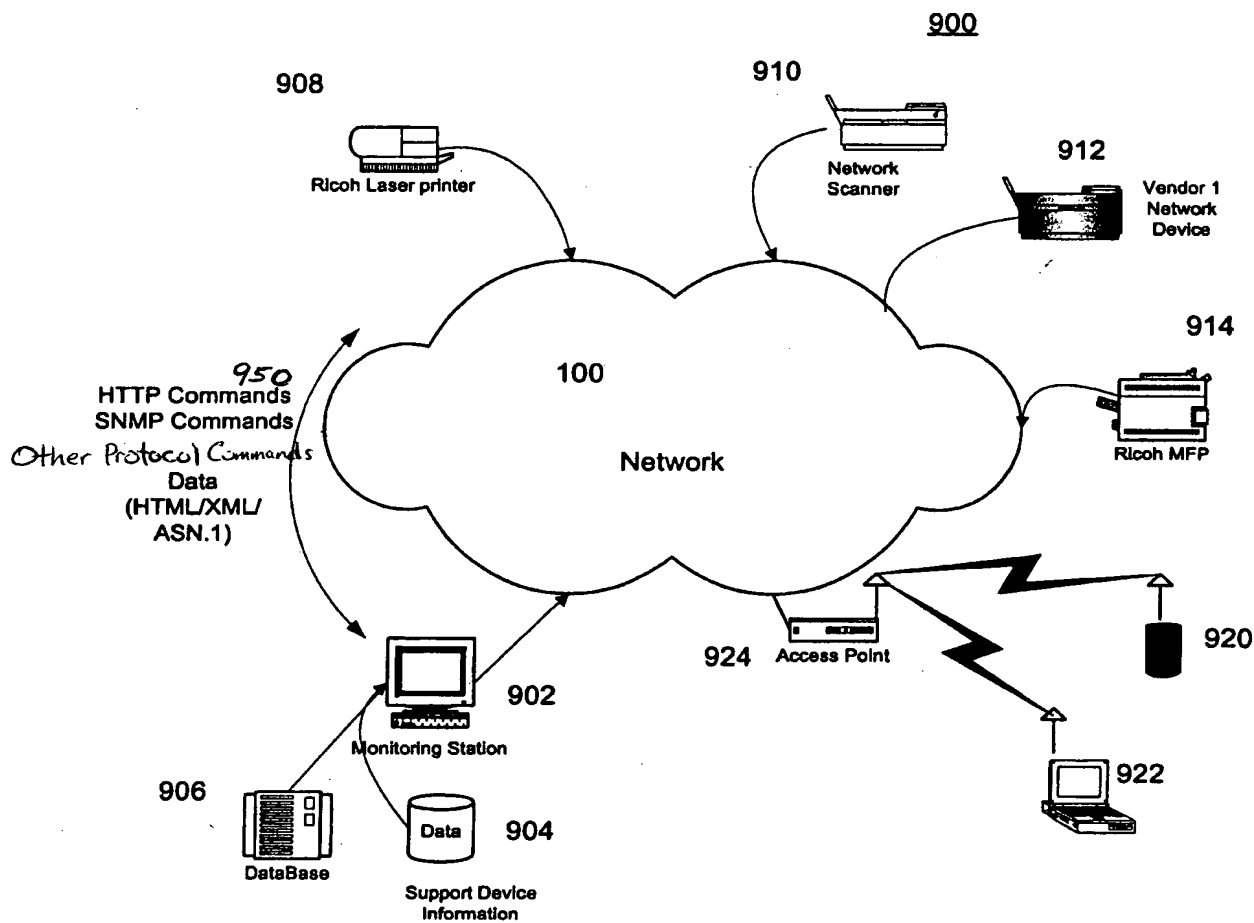


Figure 9

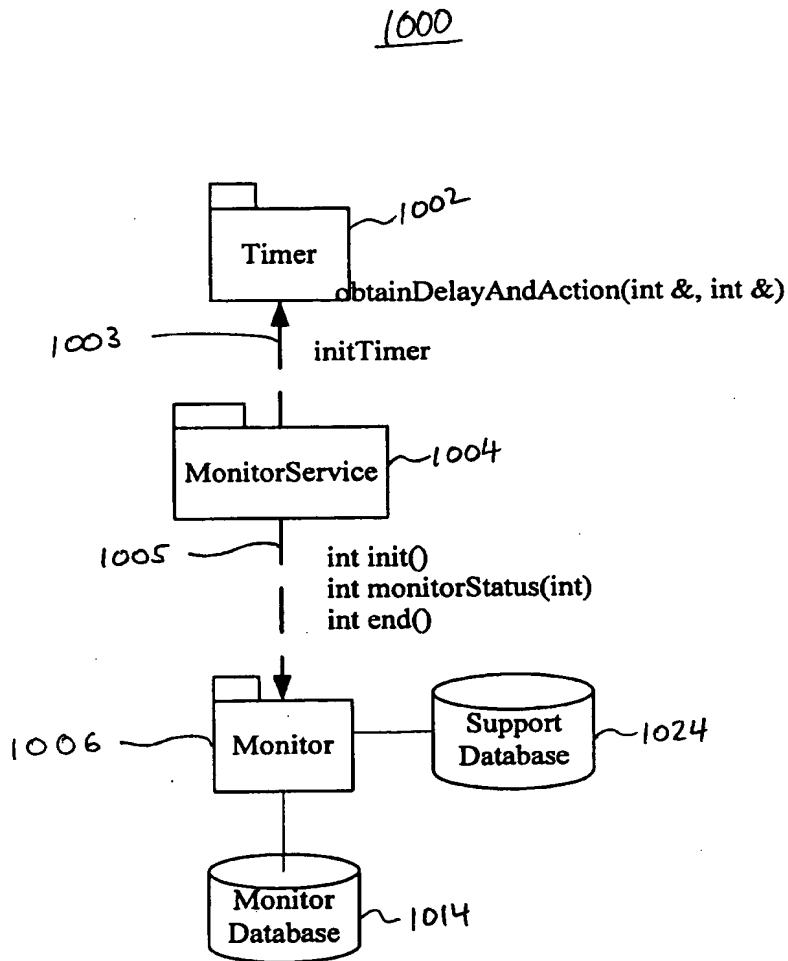


FIG. 10

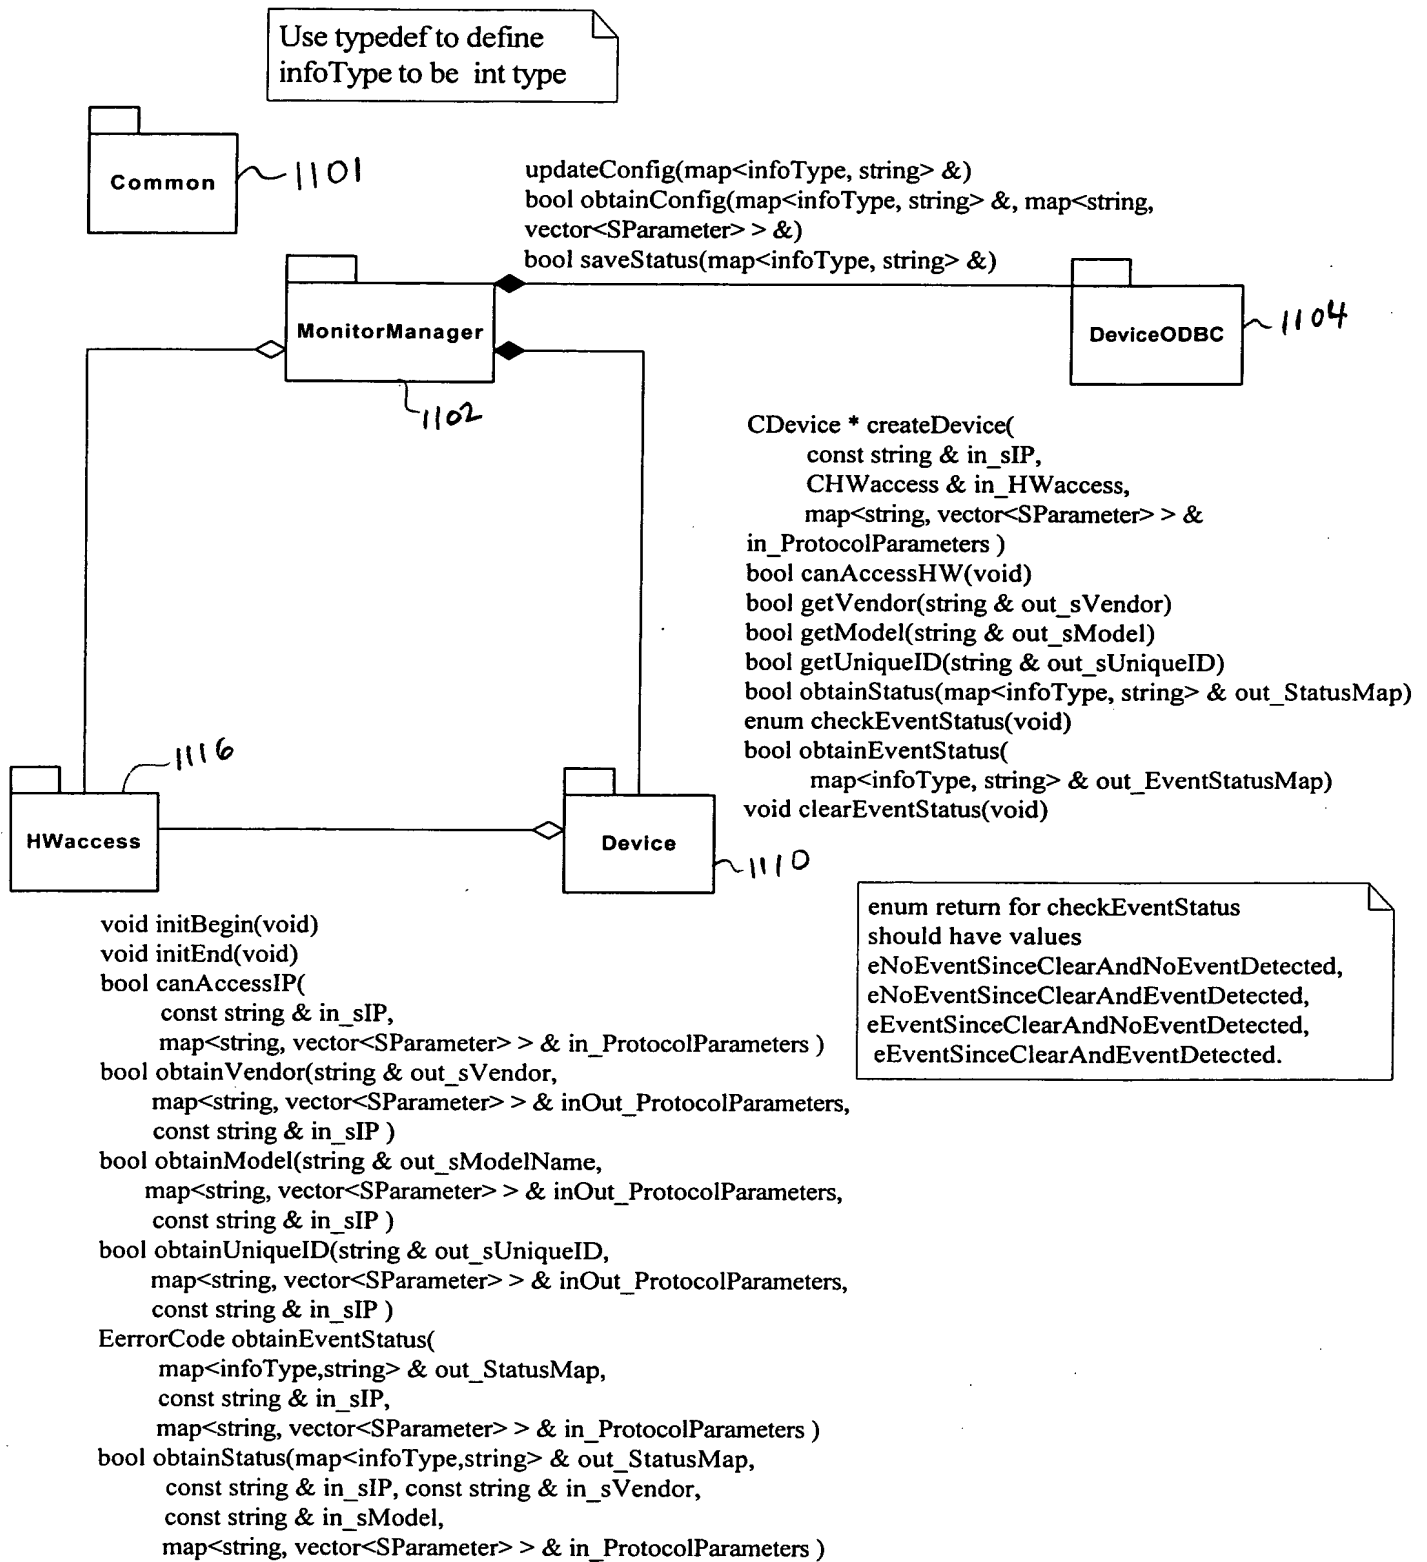


FIG. 11

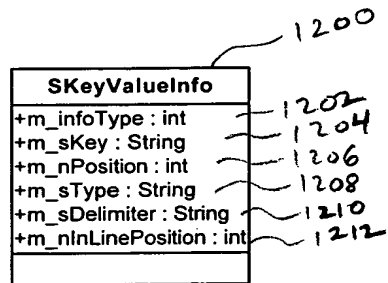


FIG. 12

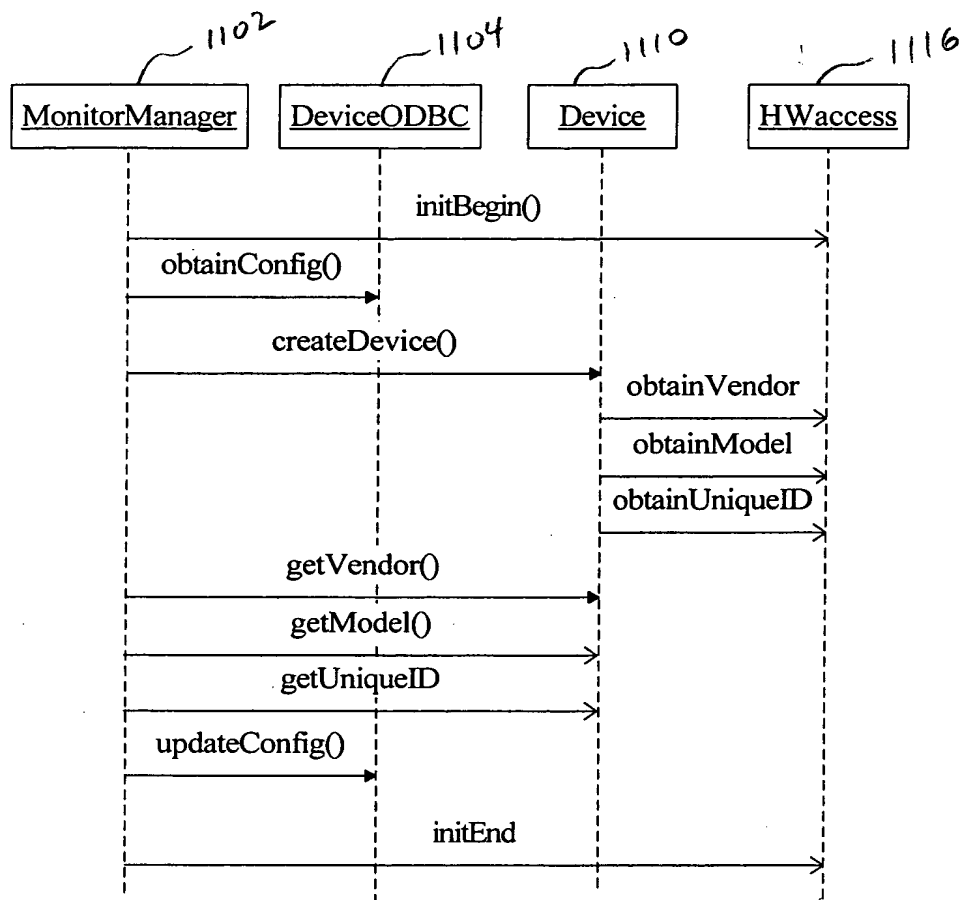


FIG. 13

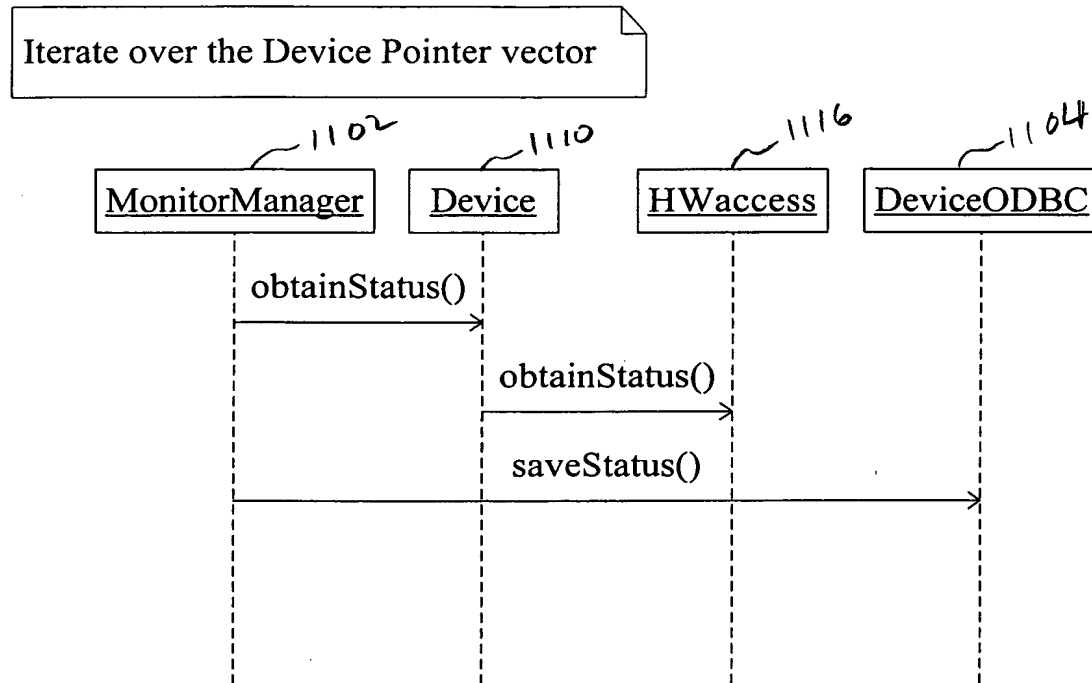


FIG. 14

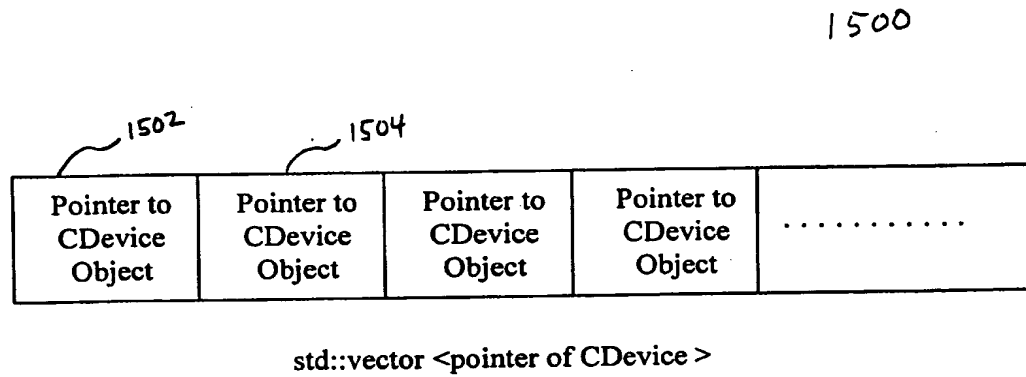


FIG. 15



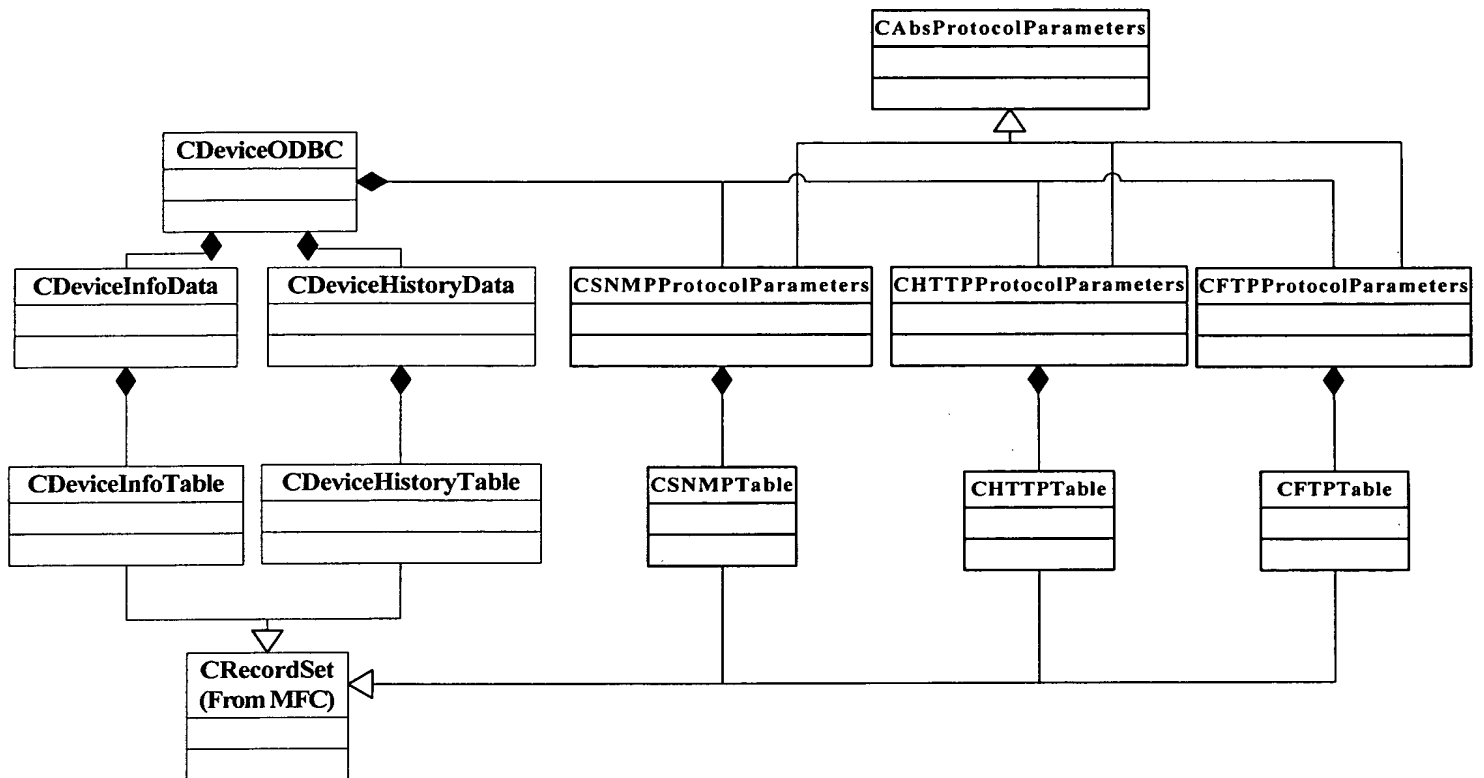


FIG. 16

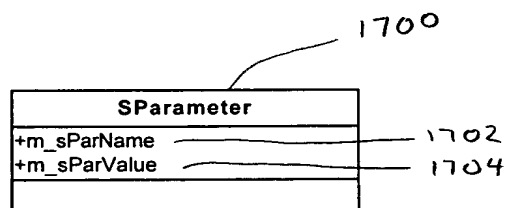


FIG. 17

A table with two columns: **Protocol (Key)** and **Vector of SParameter (Value)**. The table is labeled with reference number 1800. The rows are labeled with reference numbers 1802, 1804, and 1806 on the left, and 1808, 1810, and 1812 on the right.

Protocol (Key)	Vector of SParameter (Value)
"SNMP"	
"HTTP"	
"FTP"	

FIG. 18

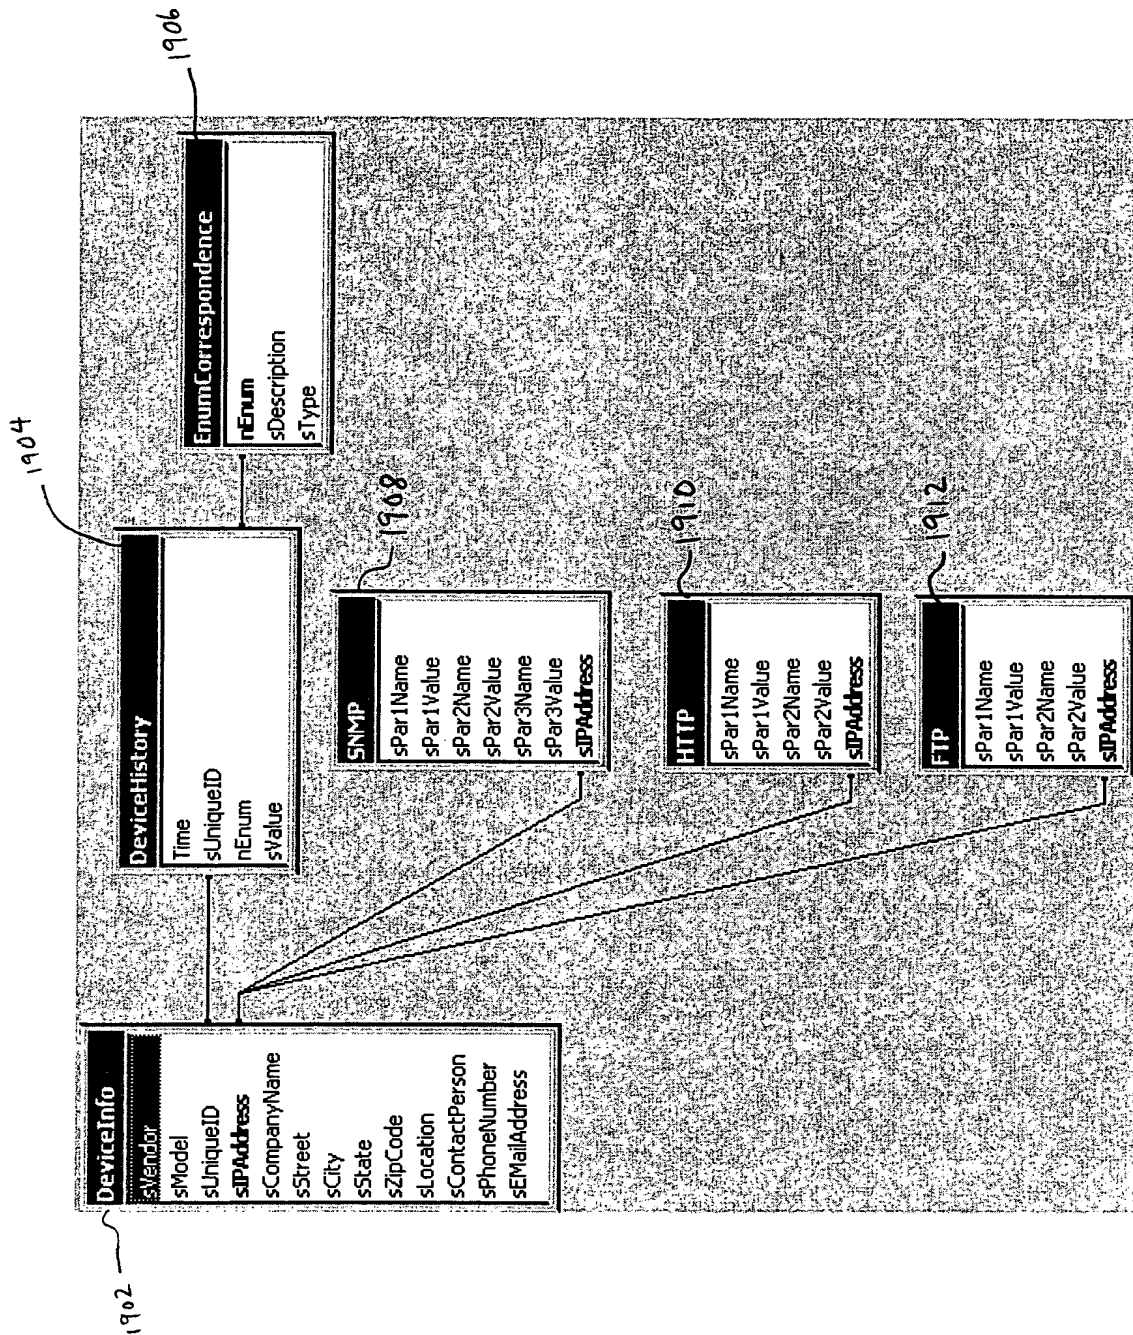


FIG. 19

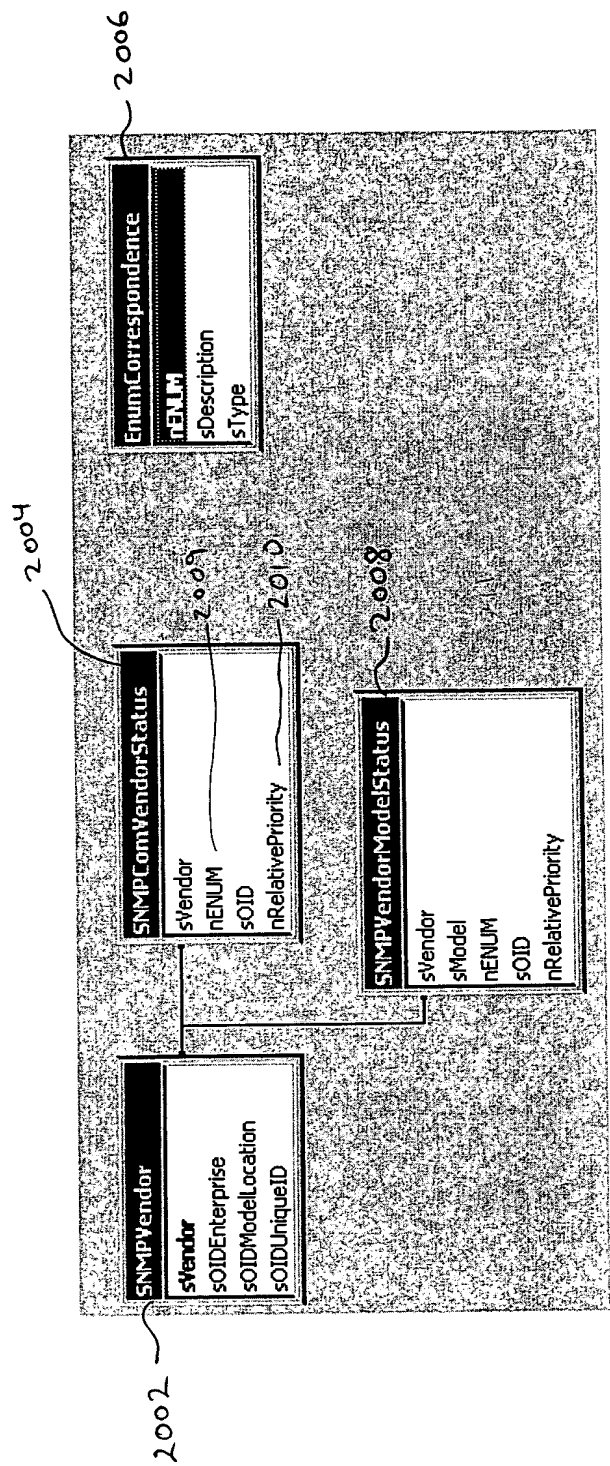


FIG. 20

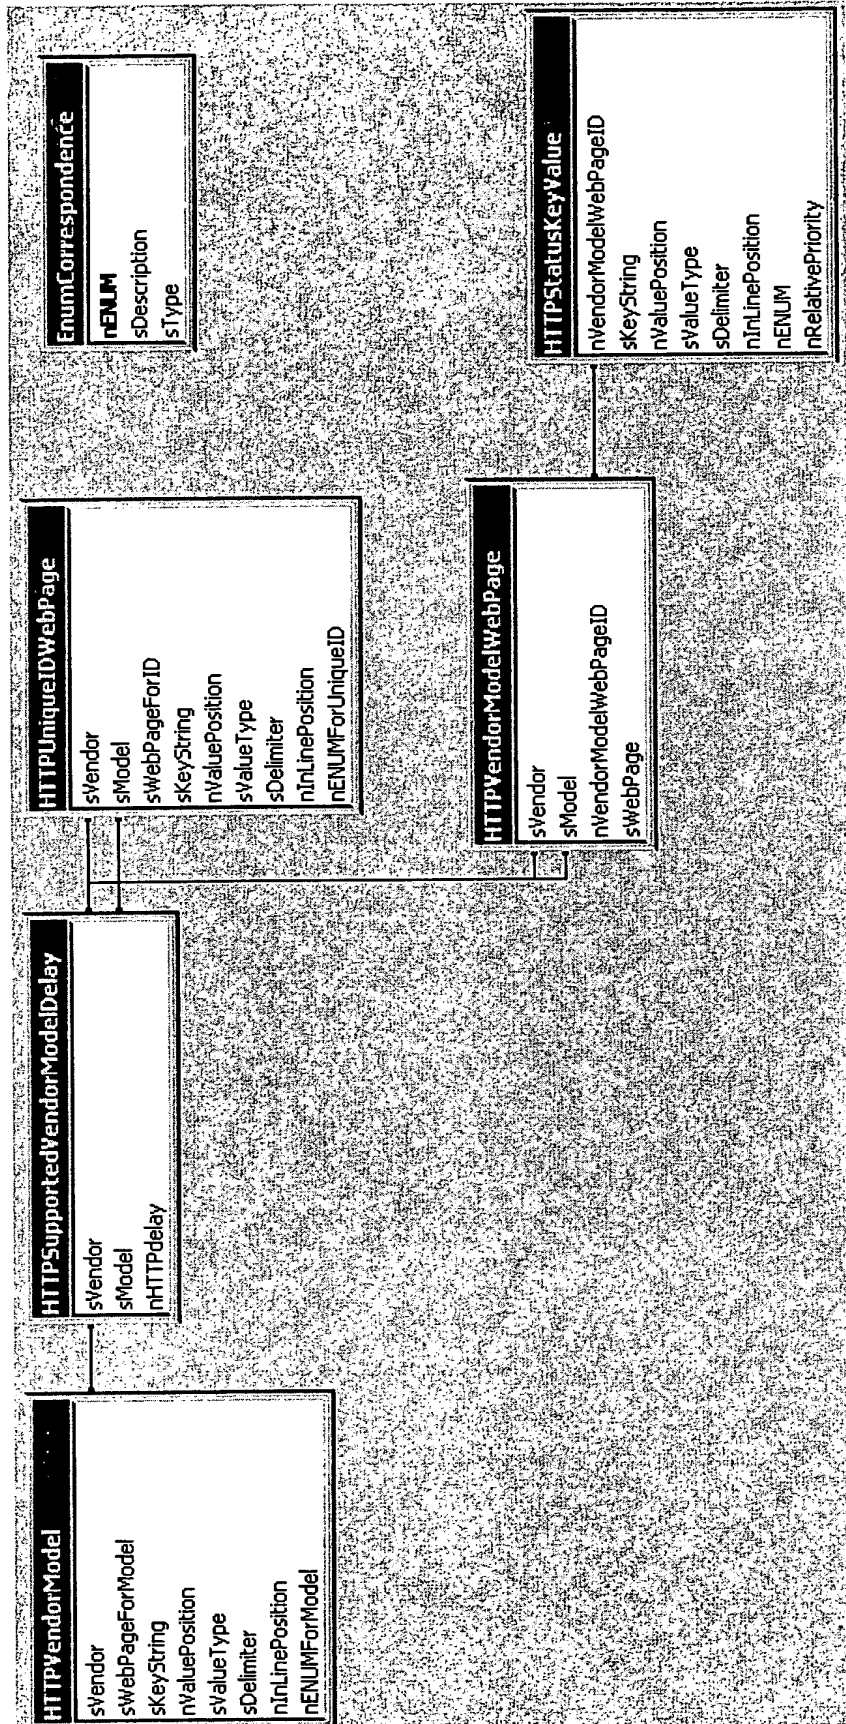


FIG. 21

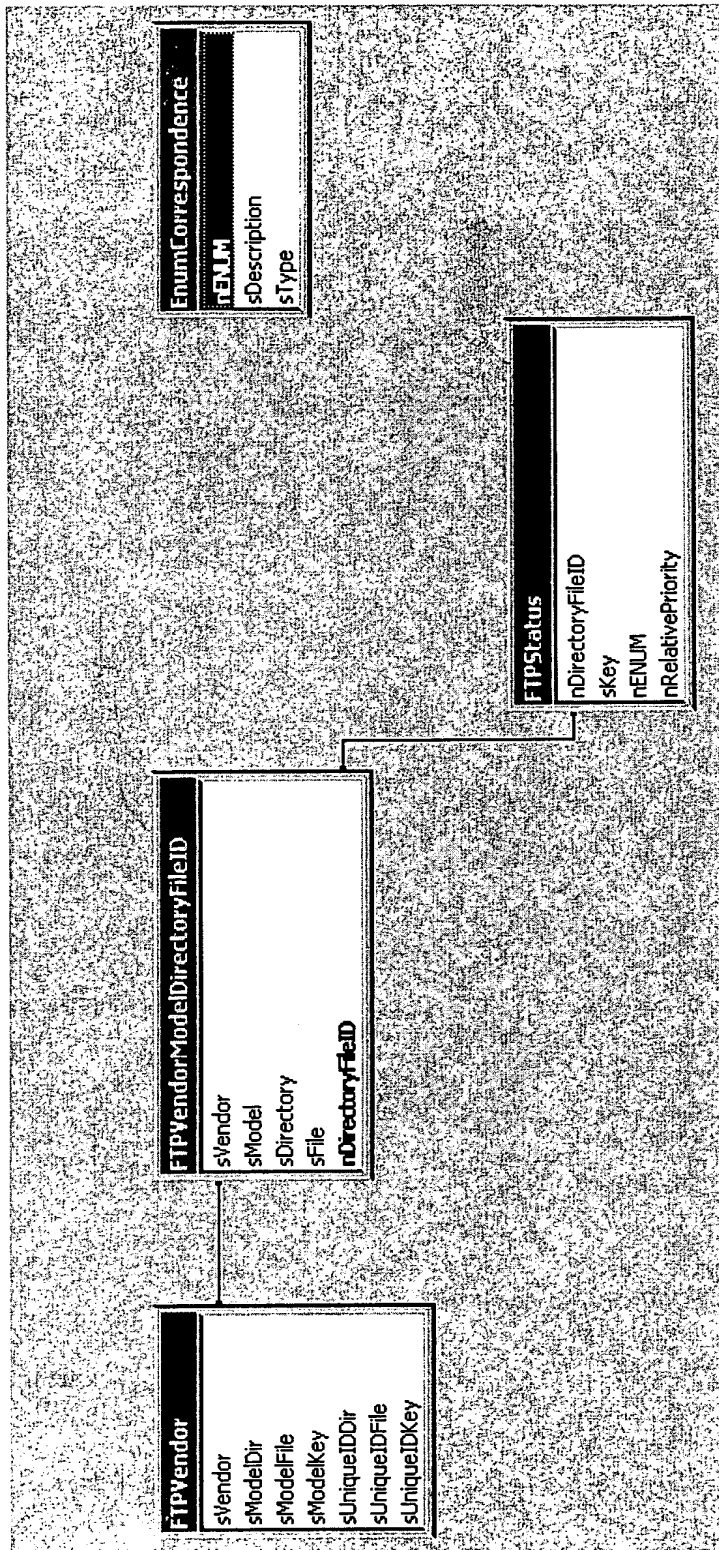


FIG. 22

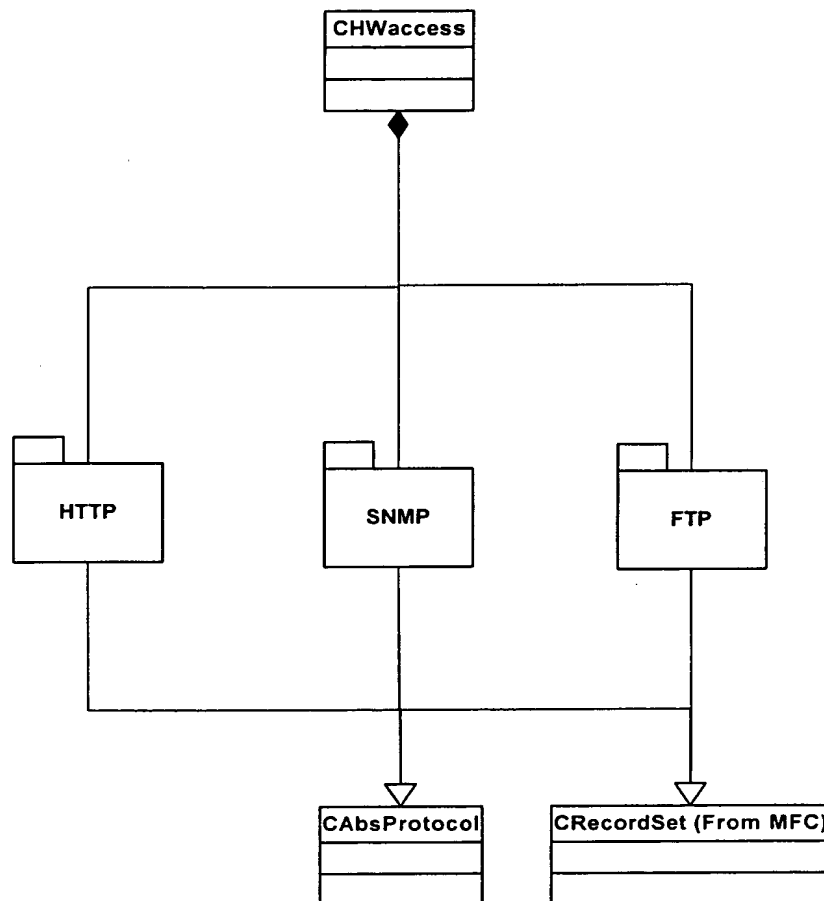


FIG. 23

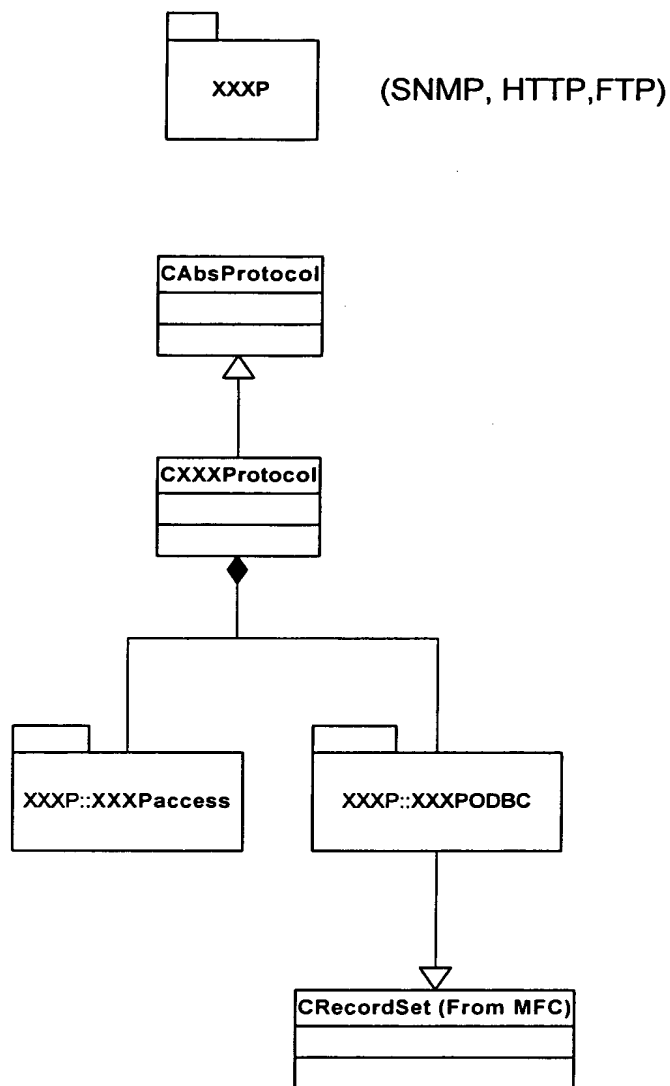


FIG. 24



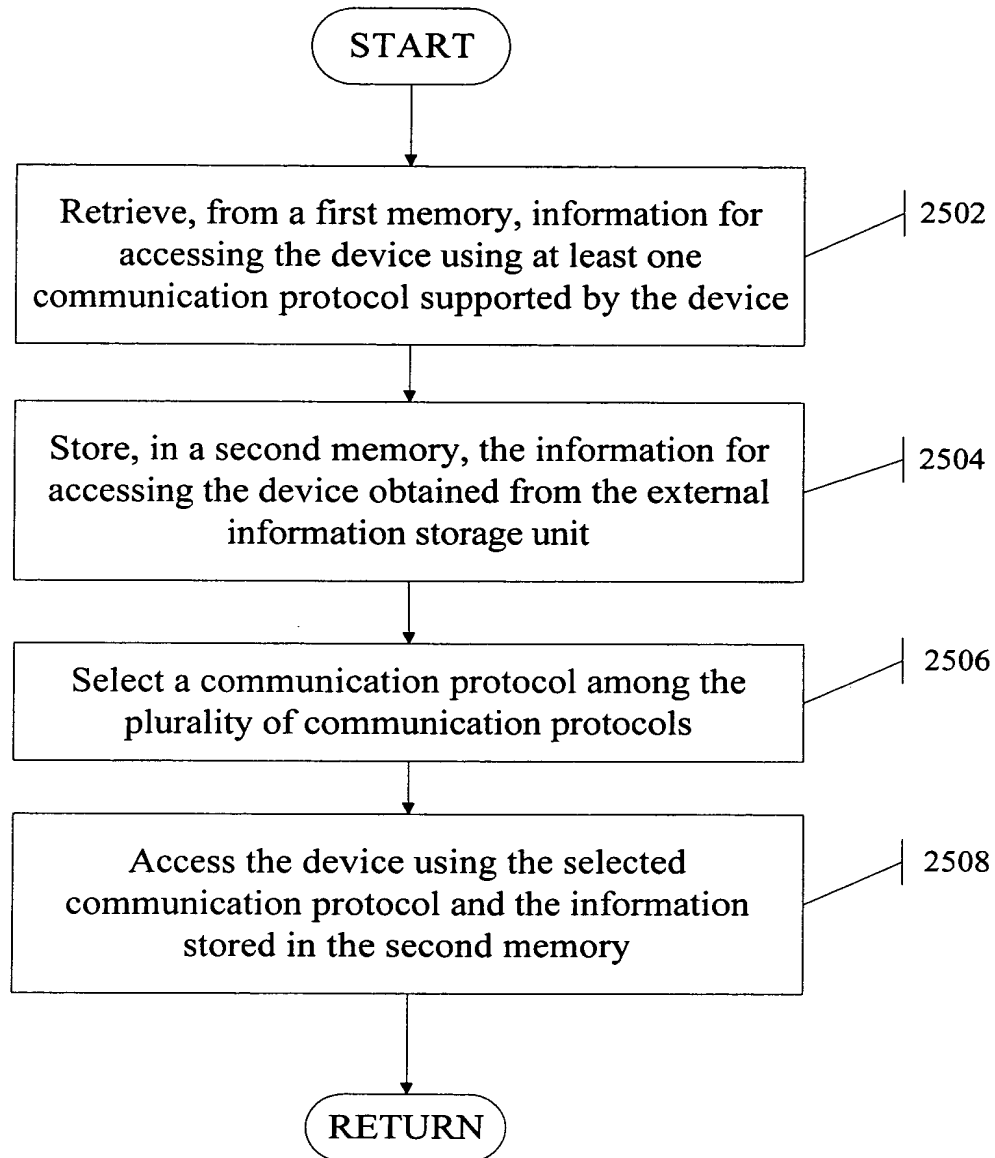


FIG. 25